


## CFS-MAN550

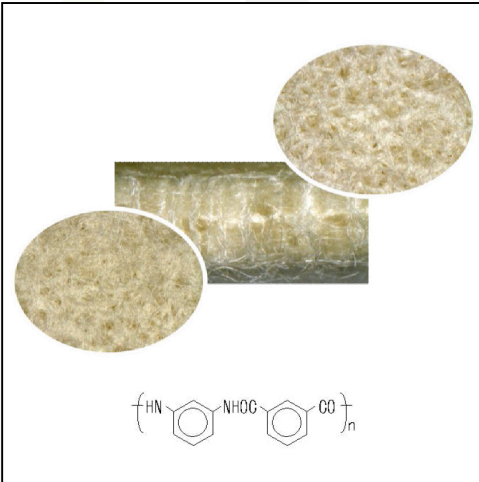

### m-aramid Filtration Media

**Fibre:** 100% meta-aramid  
**Scrim:** 100% meta-aramid  
**Basis Weight:** 550 g/m<sup>2</sup>  
**Permeability:** 30 - 40 ft<sup>3</sup>/ft<sup>2</sup>.min (cfm) at 1/2" w.g. pressure  
 9.1 – 12.2 m<sup>3</sup>/m<sup>2</sup>.min at 127Pa pressure  
**Media Finishes Available:** Singed, Fluorocarbon Treatment  
**Maximum Recommended Continuous Dry Operating Temperature:** 204°C  
**Maximum Short Term Surge Temperature:** 240°C  
**Maximum Recommended Continuous Moist Operating Temperature:** 177°C  
**Chemical Resistance:** Acids - Fair  
 Alkalis - Good  
 Oxidising Agents - Poor

*Note: Meta-aramid media may be attacked by moist heat hydrolysis, or strong acids. To avoid such occurrences please operate in an environment in accordance with the above recommendations.*

**To place an order or learn more about MAN filter media, please contact us ....**

Telephone: +64 (03) 366 1411

Fax: +64 (03) 366 1456

Email: [sales@cfsfilter.co.nz](mailto:sales@cfsfilter.co.nz)