


CFS-MAN550TT

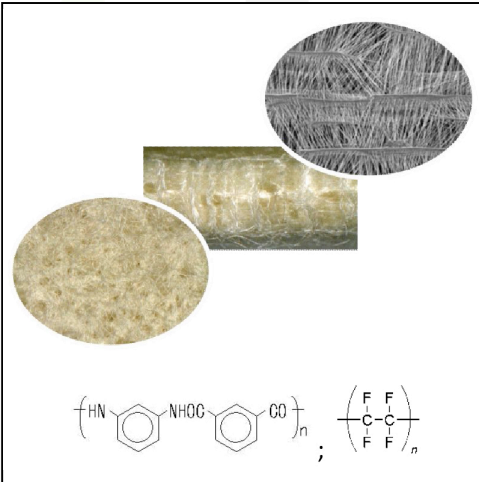

m-aramid Filtration Media

- Fibre:** 100% meta-aramid
Scrim: 100% meta-aramid
Basis Weight: 550 g/m²
Permeability: 3 - 7 ft³/ft².min (cfm) at 1/2" w.g. pressure
 0.92 - 2.1 m³/m².min at 127Pa pressure
Media Finishes Available: Expanded PTFE membrane
Maximum Recommended Continuous Dry Operating Temperature: 204°C
Maximum Short Term Surge Temperature: 240°C
Maximum Recommended Continuous Moist Operating Temperature: 177°C
Chemical Resistance: Acids - Fair
 Alkalis - Good
 Oxidising Agents - Poor

Note: Meta-aramid media may be attacked by moist heat hydrolysis, or strong acids. To avoid such occurrences please operate in an environment in accordance with the above recommendations.

To place an order or learn more about MAN filter media, please contact us

Telephone: +64 (03) 366 1411

Fax: +64 (03) 366 1456

Email: sales@cfsfilter.co.nz